

Established since 1981, Waterco is an Australian public listed company involved in the manufacture and distribution of:

Swimming pool/spa equipment and chemicals Domestic water filters, softeners and purifiers Commercial and Industrial water treatment equipment.

Waterco's research & development team has created an innovative range of award winning products.

The company's advanced fibreglass winding and pioneering plastic moulding techniques have delivered premium quality products to over 40 countries via its branches operating in Australia, New Zealand, Malaysia, China, the United Kingdom, United States of America, Canada, Indonesia and Singapore.



VIC/TAS - Melbourne Tel: +61 3 9764 1211 WA - Perth Tel: +61 8 9273 1900 SA/NT - Adelaide Tel: +61 8 8244 6000

el: +44 (0) 1795 521 73 Vaterco (USA) Inc Augusta, Georgia, USA Tel: +1 706 793 7291

el: +1 450 796 1421 terco (NZ) Limited

Waterco (Far East) Sdn Bhd Selangor, Malaysia Tel: +60 3 6145 6000 PT Waterco Indonesia

Jakarta, Indonesia Tel: +62 21 4585 1481 Waterco Singapore Intl Pte Ltd DISTRIBUTED BY:















COMMERCIAL CENTRIFUGAL PRE-FILTRATION

- Suitable for new and existing installations
- **(6)** 2 year warranty

www.waterco.com

Centrifugal water filtration

The MultiCyclone works on the basis of centrifugal water filtration. There are no moving parts to wear and tear, and no filter media to clean or replace.



50mm / 2" quick fit unions

UV and corrosion proof

Hydraulically efficient design

16 multiple hydro cyclones

Glass filled reinforced thermoplastic

Lock ring

Clear poly carbonate sediment chamber

25mm / 1" sediment purge valve

- i. Incoming water enters 16 hydro cyclones tangentially, generating a strong centrifugal effect.
- ii. The sediment is spun out to the hydro cyclone's wall, and then spirals down to the sediment chamber*.
- iii. The filtered water migrates towards the centre of the hydro cyclone where the flow reverses and spirals upwards through the outlet.
- iv. Accumulation of sediment can be visibly monitored through the MultiCyclone's clear sediment chamber.
- *Note:The MultiCyclone is designed to filter sediment that is heavier than water, floating debris cannot be filtered out by centrifugal filtration.


Simple maintenance

The MultiCyclone is easily cleaned by opening its purge valve. Only 15 litres of water is discharged to cleanse the MultiCyclone.




Specifications

Model	Connection Ports	Flow	Flow	Pressure
MultiCyclone 16	50mm / 2"	50lpm / 3m³/hr	500lpm / 30m³/hr	690 kPa (100psi)

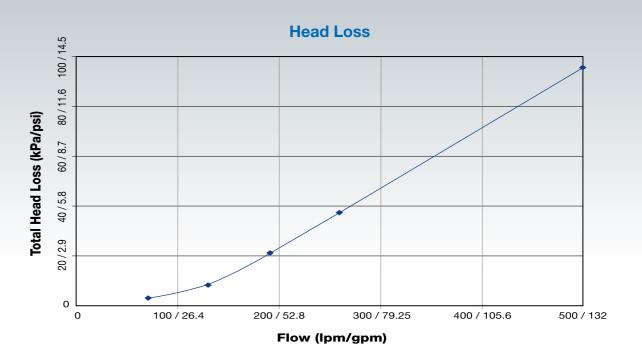

Dimensions (mm/in)



Warranty

MultiCyclone is covered by a 2 year warranty and 1 year warranty on labour. Commercial installations are covered by a 1 year warranty.

